



Town of Elk Point
 PO Box 448
 ELK POINT, AB T0A 1A0
 Phone: (780) 724 3810
 Fax: (780) 724 2762
 www.elkpoint.ca



PRIVATE SEWAGE DISPOSAL SYSTEM APPLICATION FORM

Application Date: DD / MMM / YYYY

Estimated Project Start Date: DD / MMM / YYYY

Estimated Project Completion Date: DD / MMM / YYYY

Applicant Type: Homeowner Contractor

Cost of Installation (Labour & Material Including Equipment) \$ _____

The Permit Holder hereby certifies that this installation will be completed in accordance with the Alberta Safety Codes Act. A permit may expire if the undertaking to which it applies: (a) is not commenced within 90 days of issue of the permit, (b) is suspended or abandoned for a period of 120 days. An extension can be considered when applied for in writing prior to permit expiry date.

Owner Name: _____ Mailing Address: _____

City: _____ Prov: _____ Postal Code: _____ Phone: _____ Fax: _____

Cell: _____ Email: _____

Owner's Signature / Declaration (Single Family Residential Only)

"I hereby declare I am the owner of the premises in which the work will be conducted, and reside or will reside on the property. I am doing the work myself, and assume responsibility for compliance with the applicable Act and Regulations"

Company Name: _____ Mailing Address: _____

City: _____ Prov: _____ Postal Code: _____ Phone: _____ Fax: _____

Cell: _____ Email: _____

PSDS Installer's Number _____ Print Private Sewage Installer's Name _____ Installer's Signature _____

Project Location in the Town of Elk Point:

Street Address: _____ Tax Roll #: _____

Legal Subdivision: Part of: _____ Section: _____ Township: _____ Range: _____ West of: _____

Subdivision Name: _____ Lot: _____ Block: _____ Plan: _____

Directions: _____

INSTALLATION:

New installation

Alteration

Expected Volume of Sewage:

m3 per day

Litres per day

Gallons per day

TYPE OF WORK:

Commercial

Residential

_____ Number of Bedrooms

Work Camp

_____ Number of Men

Other _____

TREATMENT / DISPOSAL METHODS

(COMPLETE ALL APPLICABLE ITEMS):

Treatment Mound

Disposal Field

Sewage Lagoon

Open (Surface) Discharge

Sand Filter

Packaged Sewage Treatment Plant

Septic Tank Size _____

Sewage Holding Tank Size: _____

Other _____

Description of Work: _____

COMPLETE THE ATTACHED SITE EVALUATION REPORT.

Payment Type: Cash Cheque Interac M/C Visa

Permit Fee: \$ _____

+ SCC Levy*: \$ _____

+ Admin Fee: \$ _____

Total Cost: \$ _____ Receipt #: _____

*\$4.50 or 4% of the permit fee maximum \$560.00

The Inspections Group Inc.

#110, 4910 50 Avenue

COLD LAKE AB T9M 0G1

Phone: (780) 594 4301 / (888) 853 6411

Fax: (780) 594 3720 / (844) 750 3721

www.inspectionsgroup.com

questions@inspectionsgroup.com

PLEASE CONTACT THE INSPECTIONS GROUP INC. FOR INSPECTIONS ALLOWING 2 – 5 WORKING DAYS NOTICE AND PROVIDE SAFE ACCESS.

The personal information provided as part of this application is collected under the Safety Codes Act and the Municipal Government Act and in accordance with the Freedom of Information and Protection of Privacy Act. The information is required and will be used for issuing permits, safety codes compliance verification and monitoring, and property assessment purposes. The name of the permit holder and the nature of the permit is available to the public upon request. If you have any questions about the collection or use of the personal information provided, please contact the Municipality.



PSDS PERMIT APPLICATION CHECKLIST

A COMPLETE SITE EVALUATION REPORT, AS PER THE 2021 ALBERTA PRIVATE SEWAGE SYSTEMS STANDARD OF PRACTICE (SOP) PART 7 SITE EVALUATION, IS REQUIRED WITH THE PERMIT APPLICATION. THE FOLLOWING DOCUMENTS ARE TO BE INCLUDED WITH YOUR COMPLETE SITE EVALUATION REPORT.

TREATMENT FIELD, MOUND, OR LFH AT-GRADE SYSTEMS

- Wastewater strength projected for the development.
- Peak flow volume calculations for the development including confirmation plumbing fixture unit total is not exceeded.
- Site plan – as per current SOP Section 7.1 Site Characteristics and Evaluation Procedures including placement of system with setbacks noted for property lines, buildings, water sources/courses, description of surface features including slope and landscape, location of at least two (2) soil profile investigation locations in the area of the soil-based treatment system, etc.
- The characteristics of each soil profile investigated shall be described using Canadian System of Soil Classification nomenclature and includes complete site specific soil profile logs for at least two (2) locations, soil sample results of the most limiting condition, GPS coordinates of each soil profile with permanent benchmark, depth of each horizon identified, soil Colour (Munsell Nomenclature), soil texture, structure and grade, depth to most limiting condition, restrictive layer (if applicable), etc.
- Description of treatment system including a system diagram, piping to tank details, initial treatment (septic tank/ treatment plant), piping to and throughout final soil treatment component.
- Soil based treatment system design calculations, including pressure distribution system – if applicable.
- Tank certification information – CAN/CSA-B66 certificate or equivalent
- Package sewage treatment plant – treatment capacity, equipment structural requirements and certification (if applicable).
- Pump, if required by design. Manufacturer and pump curve to ensure flow capacity.
- High level alarm make/model.
- Filter type.

HOLDING TANK

- Expected wastewater volume/day including tank storage capacity, bedroom count – current and proposed.
- Site plan showing placement of system with setbacks noted for property, buildings and water source.
- Tank certification information – CAN/CSA-B66 certificate or equivalent
- High level alarm make/model

OPEN DISCHARGE SYSTEM

- Peak flow volume calculations for the development including confirmation plumbing fixture unit total is not exceeded.
- Site plan – as per current SOP Section 7.1 Site Characteristics and Evaluation Procedures including placement of system with setbacks noted for property lines, buildings, water sources/courses, description of surface features including slope and landscape, location of at least one (1) soil profile investigation location in the area of the soil-based treatment system, etc.
- The characteristics of each soil profile investigated shall be described using Canadian System of Soil Classification nomenclature and includes complete site specific soil profile logs for at least one (1) location, soil sample results of the most limiting condition, GPS coordinates of each soil profile with permanent benchmark, depth of each horizon identified, soil Colour (Munsell Nomenclature), soil texture, structure and grade, depth to most limiting condition, restrictive layer (if applicable), etc.
- Description of treatment system including a system diagram, piping to tank details, Septic Tank, piping to and throughout final soil treatment component.
- Tank certification information – CAN/CSA B66 certificate or equivalent
- Pump, if required by design. Manufacturer and pump curve to ensure flow capacity
- High level alarm make/model
- Filter type.



PSDS Application Design Summary

This document must be filled out with ALL relevant information or your application may be returned

| Legal Land Description | | | | | | | | |
|--|----------------------|--------------------|-------------------------|--|---------|-------------------------|-------|------|
| Quarter | Section | Township | Range | West of | | Lot | Block | Plan |
| | | | | | | | | |
| Municipal Address | | | | | | | | |
| | | | | | | | | |
| Development Details | | | | | | | | |
| Property type _____ | | | | New – Renovation – Repair - Replacement (Circle One) | | | | |
| Total Bedrooms | Occupant Total | Average Daily Flow | | Peak Daily Flow | | | | |
| | | | | | | | | |
| Soil Information | | | | | | | | |
| Test Pit(s) Depth | Limiting Layer Depth | | Restrictive Layer Depth | | | Depth to Seasonal Water | | |
| | | | | | | | | |
| Design Loading Rate | Linear Loading Rate | | Infiltration Area | | Texture | Shape | Grade | |
| | | | | | | | | |
| Primary Treatment (Circle all that apply) Holding Tank – Septic Tank – Treatment Plant | | | | | | | | |
| Tank Size | | | Tank Make/Model | | | Filter Type | | |
| | | | | | | | | |
| High Level Alarm Make/Model | | | | Effluent Filter Make/Model | | | | |
| | | | | | | | | |
| Additional Information | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

All designs must meet the requirements of the current Standard of Practice available at: https://ebs.safetycodes.ab.ca/documents/webdocs/PI/PSS_SOP_2021-web6.pdf

Please note: NO WORK MAY START WITHOUT A PERMIT BEING ISSUED. An application is not a Permit.

Design Documents may be found at: <https://www.alberta.ca/private-sewage-design-tools>

Alberta Private Sewage Treatment System Soil Profile Log Form

Owner Name or Job ID.

Legal Land Location

Test Pit GPS Coordinates

| | | | | | | | | | |
|---------|-----|-----|----|-----|-----|-------|------|---------|----------|
| LSD-1/4 | Sec | Twp | Rg | Mer | Lot | Block | Plan | Easting | Northing |
|---------|-----|-----|----|-----|-----|-------|------|---------|----------|

Vegetation notes:

Overall site slope %

Slope position of test pit:

| | | | | | |
|---------------|---------------|-----------------|----------|------------------------|------------------------|
| Test hole No. | Soil Subgroup | Parent Material | Drainage | Depth of Lab sample #1 | Depth of Lab sample #2 |
|---------------|---------------|-----------------|----------|------------------------|------------------------|

| Horizon | Depth (cm) (in) | Texture | Lab or HT | Colour | Gleying | Mottling | Structure | Grade | Consistence | Moisture | % Coarse Fragments |
|---------|-----------------|---------|-----------|--------|---------|----------|-----------|-------|-------------|----------|--------------------|
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |

Depth to Groundwater

Limiting Soil Layer Characteristic, describe

Depth to Seasonally Saturated Soil

Depth to Limiting Soil Layer

Limiting Topography

Depth to Highly Permeable Layer

Key Limiting Features on System Design

Weather Condition notes:






Comments: such as root depth and abundance or other pertinent observations:

Onsite Sewage System Site Evaluation Lot Diagram Sketch and Notes

Project Name:

Lot or Legal Description:

Date:

| | | | | | | | | | | | | | |
|---|--|--|--|--|--|--|--|--|---|--|--|--|--|
|  | <p>Show the proposed location of the onsite sewage system and the following items indicating their distances from the proposed system:</p> <ul style="list-style-type: none"> trees floodplains wells water sources surface water bedrock outcrops buildings property lines easement lines ditches or interceptors banks or steep slopes fills driveways existing sewage systems underground utilities soil test pit and borehole locations | | | | | | | | | | | | |
| drainage course  | | | | | slope direction  | | | borehole BH 1  | Test Pit P1  | | | | |

Comments:

Property line GPS coordinates:


GPS coordinates of well:

GPS coordinate of tank:

GPS coordinates of soil treatment component corners:

Additional information is required separately for the system design detail.

Figure 4: Diagrammatic representation of soil structure

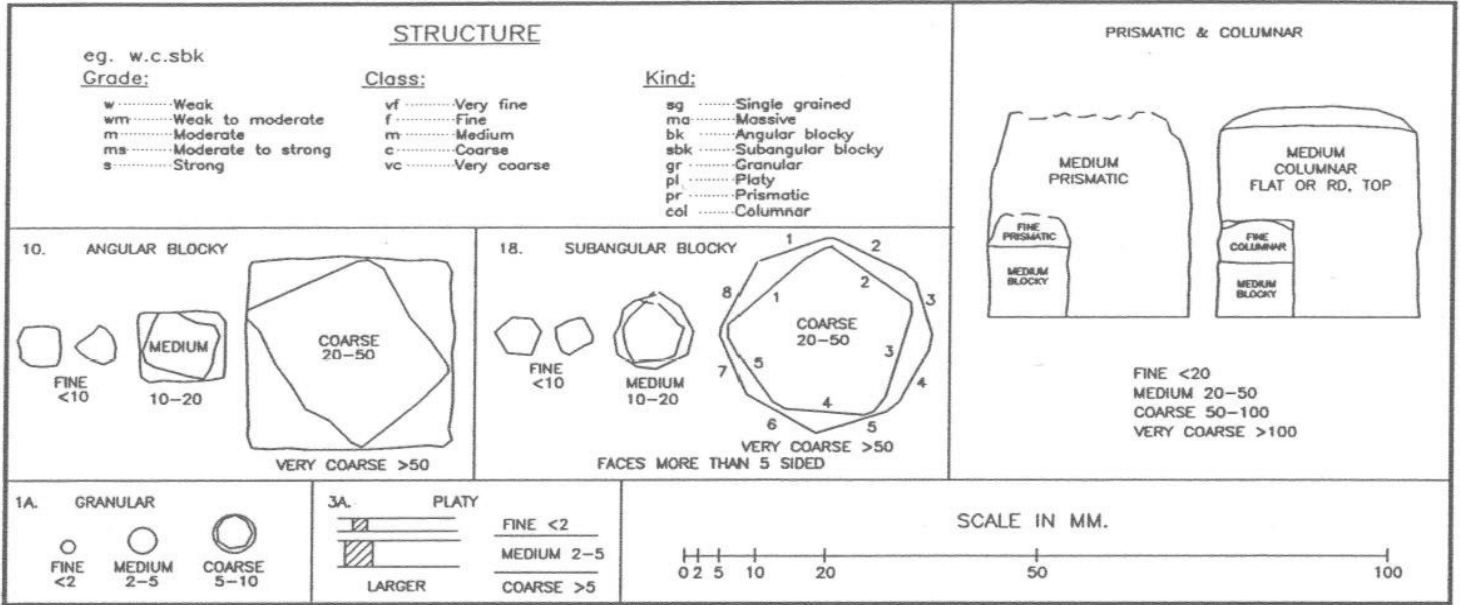

SLOPE CLASSES OF LOCAL LANDFORMS

| Slope Class | Percent Slope | Approximate Degrees | Description |
|-------------|---------------|---------------------|--------------------|
| 1 | 0-0.5 | 0 | level |
| 2 | 0.5-2.5 | 0.3-1.5 | nearly level |
| 3 | 2-5 | 1-3 | very gentle slopes |
| 4 | 6-9 | 3.5-5 | gentle slopes |
| 5 | 10-15 | 6-8.5 | moderate slopes |
| 6 | 16-30 | 9-17 | strong slopes |
| 7 | 31-45 | 17-24 | very strong slopes |
| 8 | 46-70 | 25-35 | extreme slopes |
| 9 | 71-100 | 35-45 | steep slopes |
| 10 | >100 | >45 | very steep slopes |

SURFACE STONINESS

| | Surface Area | Distance Apart (cm) |
|----------------------|--------------|---------------------|
| S0 non-stony | <0.01% | >30 |
| S1 slightly stony | 0.01-0.1% | 10-30 |
| S2 moderately stony | 0.1-3% | 2-10 |
| S3 very stony | 3-15% | 1-2 |
| S4 exceedingly stony | 15-50% | 0.1-5 |
| S5 excessively stony | 50% | 0.1 |

SLOPE POSITION

| | |
|---|---------------|
| c | — crest |
| u | — upper slope |
| m | — mid slope |
| l | — lower slope |
| t | — toe |
| d | — depression |
| l | — level |

DRAINAGE

| | |
|----|-------------------|
| VR | - very rapidly |
| R | - rapidly |
| w | - well |
| M | - moderately well |
| I | - imperfectly |
| P | - poorly |
| VP | - very poorly |

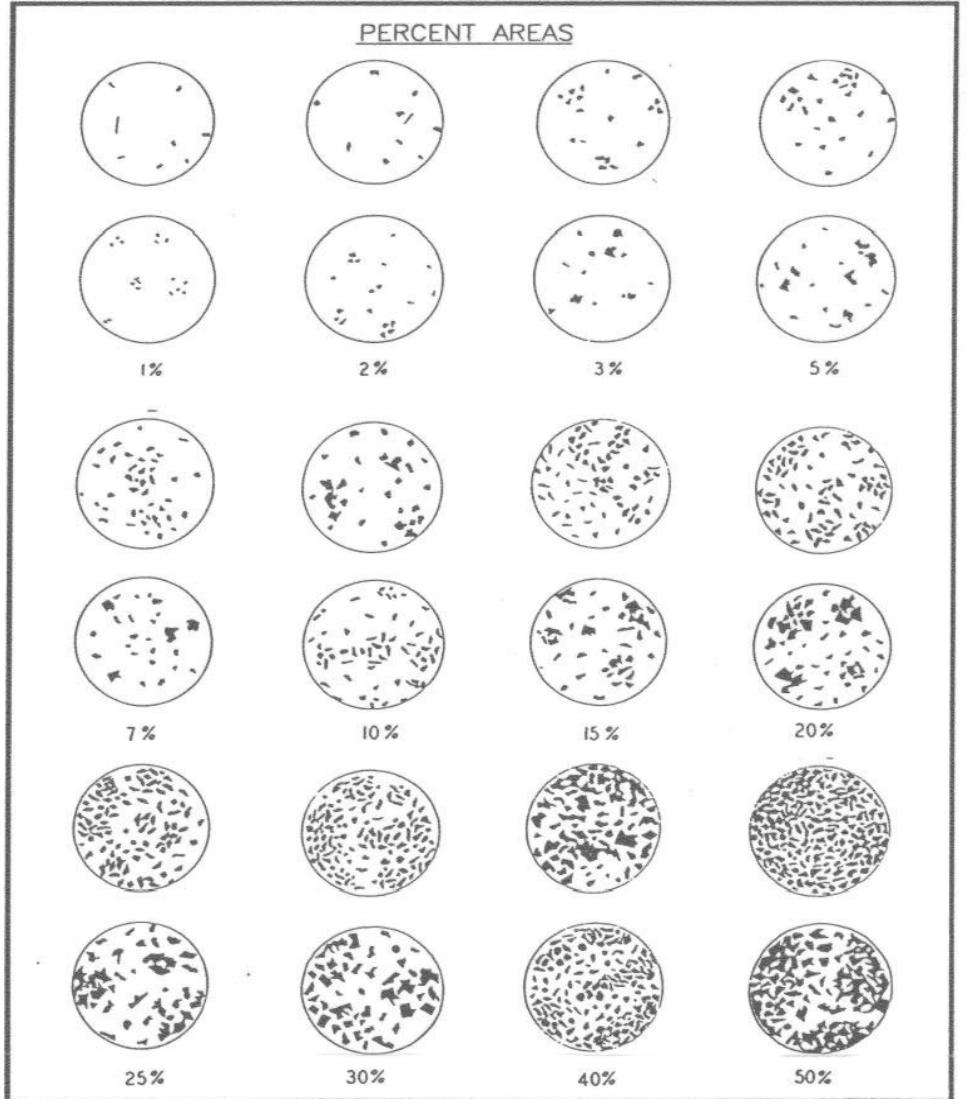


Table 10. Types, kinds and classes of soil structure.

| Type | Kind (Kind Code) | Structure Class and Code | Size ¹ (mm) |
|--|--|--|--|
| Blocklike - soil particles arranged around a point and bounded by flat or rounded surfaces BK | Angular blocky (ABK) peds bounded by flattened, rectangular faces intersecting at relatively sharp angles | VF: very fine angular blocky F: fine angular blocky M: medium angular blocky C: coarse angular blocky VC: very coarse angular blocky | <5 5-10 10-20 20-50 >50 |
| | Subangular blocky (SBK): peds bounded by slightly rounded, subrectangular faces with vertices ² of their intersections mostly subrounded | VF: very fine subangular blocky F: fine subangular blocky M: medium subangular blocky C: coarse subangular blocky VC: very coarse subangular blocky | <5 5-10 10-20 20-50 >50 |
| | Granular (GR): spheroidal peds bounded by curved or very irregular faces that do not adjoin those of adjacent peds | VF: very fine granular F: fine granular M: medium granular C: coarse granular VC: very coarse granular | <1 1-2 2-5 5-10 >10 |
| Platelike: soil particles arranged around a horizontal plane and generally bounded by relatively flat horizontal surfaces PL | Platy (PL): peds flat or platelike; horizontal planes more or less well developed | VF: very fine platy F: fine platy M: medium platy C: coarse platy VC: very coarse platy | <1 1-2 2-5 5-10 >10 |
| | | Prismatic (PR): vertical faces of peds well defined and vertices ² angular (edges sharp); prism tops essentially flat | VF: very fine prismatic F: fine prismatic M: medium prismatic C: coarse prismatic VC: very coarse prismatic |
| Structureless: no observable aggregation of primary particles or no definite orderly arrangement around natural lines of weakness MA | Columnar (COL): vertical edges near top of columns not sharp (vertices ² subrounded); column tops flat, rounded, or irregular | VF: very fine columnar F: fine columnar M: medium columnar C: coarse columnar VC: very coarse prismatic | <10 10-20 20-50 50-100 >100 |
| | Single grained (SGR): | Loose, incoherent mass of individual primary particles, as in sands | |
| | Massive (MA): | amorphous; a coherent mass showing no evidence of any distinct arrangement of soil particles; separates into clusters of particles; not peds | |
| Cloddy (CDY): not a structure; used to indicate the condition of some ploughed surface, grade, class, and shape too varied to be described in standard terms. | | | |

¹ The size limits refer to measurements in the smallest dimension of platy, prismatic, and columnar peds and to the largest of the nearly equal dimensions of blocky and granular peds.

² Definition of vertex (plural, vertices): the intersection of two planes of a geometrical figure.

| Consistence – moist soil | |
|--------------------------|--|
| • Loose: | No intact sample can be obtained. |
| • Friable: | Structure breaks down with slight force between the fingers. |
| • Firm: | Structure breaks down with moderate force between the fingers. |
| • Extremely firm: | Structure breaks down with moderate force between the hands or slight foot pressure. |
| • Rigid: | Structure breaks down only with foot pressure. |

Structure Grade Descriptions

| Code | | Structure Grade Definition |
|------|--|---|
| 0 | Massive /or single grained used to describe sands | This describes a soil that has no developed structure. There is no aggregation of primary particles or no definite orderly arrangement around natural lines of weakness. |
| 1 | Weak | Peds are either indistinct and barely evident in place, or observable in place but incompletely separated from adjacent peds. When disturbed, the soil material separates into a mixture of only a few entire peds, many broken peds and much unaggregated material. Peds are moderately durable, and are evident but not distinct in the undisturbed soil. When disturbed, the soil material parts into a mixture of many well formed, entire peds, some broken peds, and little unaggregated material. The peds may be handled without breaking and they part from adjoining peds to reveal nearly entire surfaces which have properties distinct from those caused by fracturing. |
| 2 | Moderate | Peds are durable and evident in the undisturbed soil, adhere weakly to one another, withstand displacement and separate cleanly when the soil is disturbed. When removed, the soil material separates mainly into entire peds. Surfaces of unbroken peds have distinctive properties, compared to surfaces that result from fracturing. |
| 3 | Strong | |

Mottling Descriptions

| Parameter | Code | Description |
|------------------|------------------|---|
| Abundance | Few | <2% of the exposed surface |
| | Common | 2-20% of the exposed surface |
| | Many | >20% of the exposed surface |
| Size | Fine | < 5 mm |
| | Medium | 5-15 mm |
| | Coarse | >15 mm |
| Contrast | Faint | Evident only on close examination. Faint mottles commonly have the same hue as the colour to which they are compared and differ by no more than 1 unit of chroma or 2 units of value. Some faint mottles of similar but low chroma and value can differ by 2.5 units of hue. |
| | Distinct | Readily seen, but contrast only moderately with the colour to which they are compared. Distinct mottles commonly have the same hue as the colour to which they are compared, but differ by 2 to 4 units of chroma or 3 to 4 units of value; or differ from the colour to which they are compared by 2.5 units of hue but by no more than 1 unit of chroma or 2 units of value. |
| | Prominent | Contrast strongly with the colour to which they are compared. Prominent mottles are commonly the most obvious colour feature in a soil. Prominent mottles that have medium chroma and value commonly differ from the colour to which they are compared by at least 5 units of hue if chroma and value are the same; or at least 1 unit of chroma or 2 units of value if hue differs by 2.5 units. |


**Taste Test
Stickiness Test
Worm Test**

**Moist
Cast Test**

**Graininess Test
(Organic Matter Test)**

**Moist Cast Test
Stickiness Test**

**Taste Test
Worm Test**

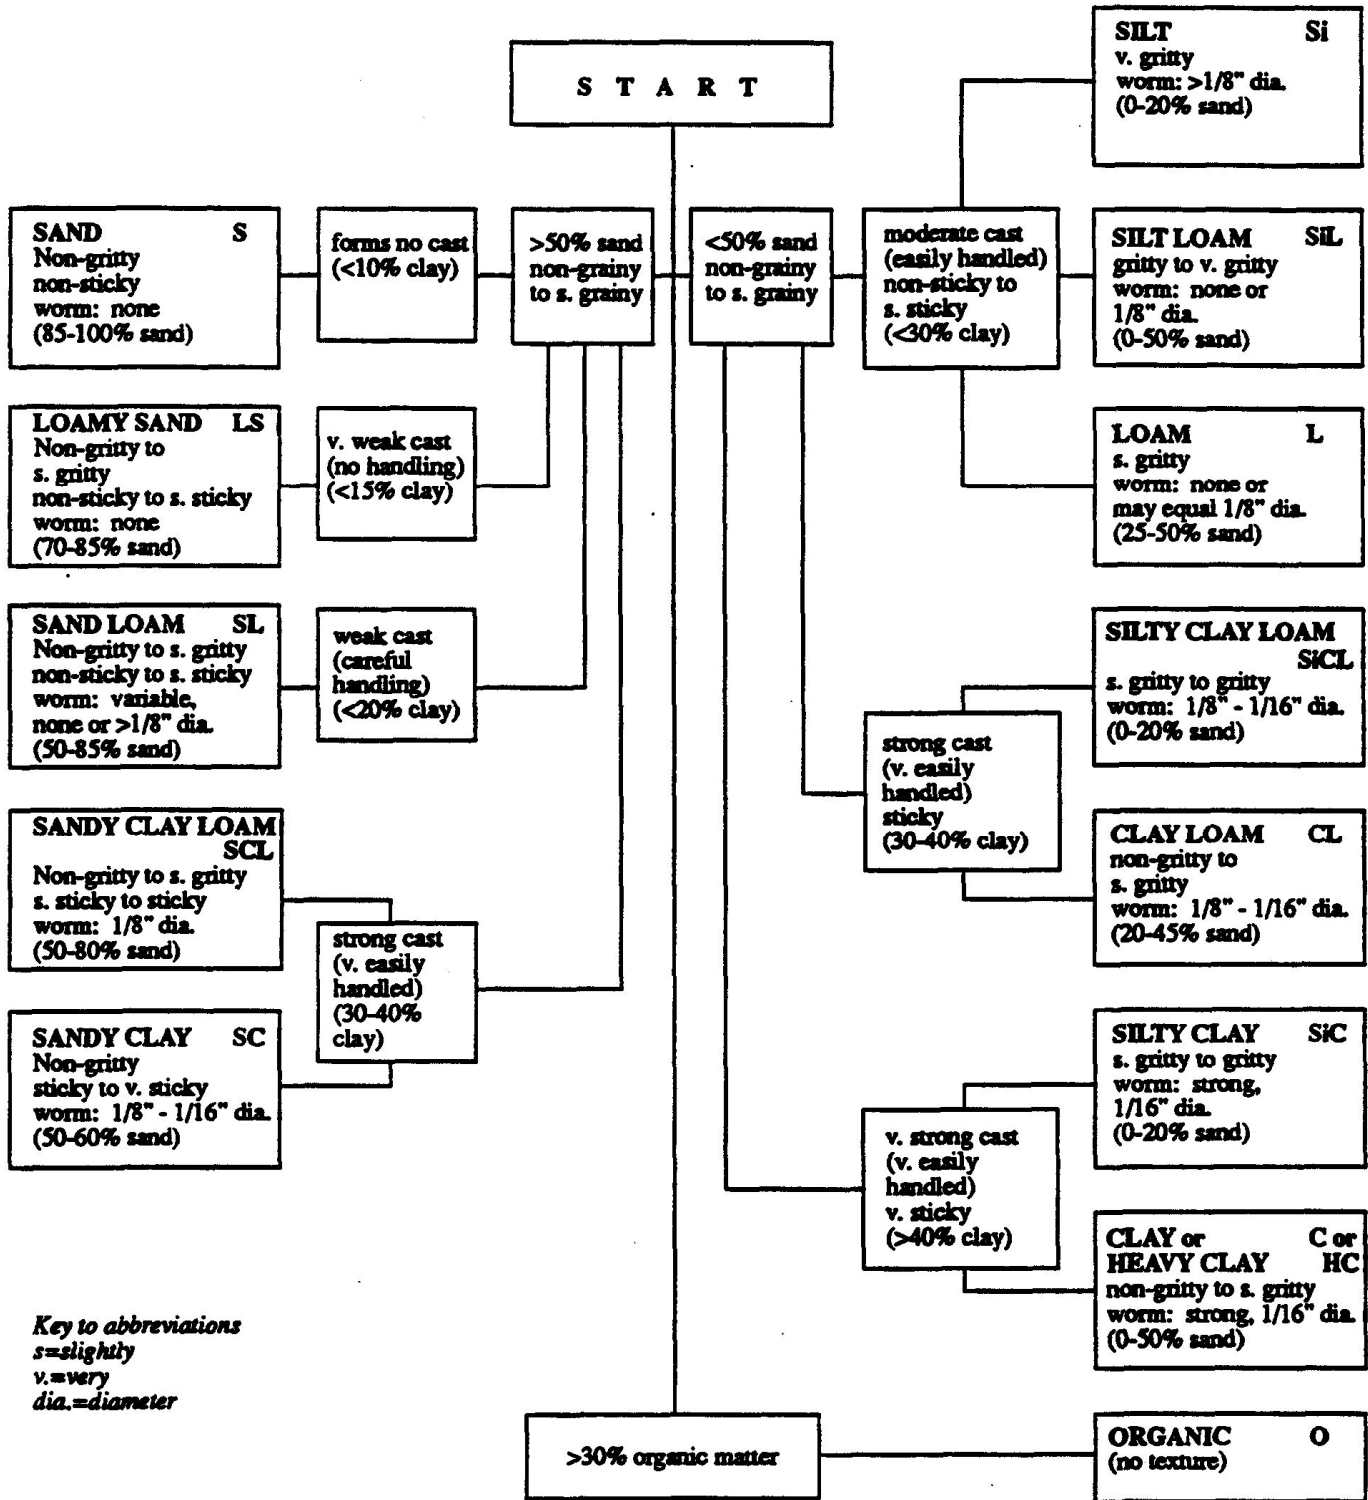

Key to abbreviations
 s=slightly
 v.=very
 dia.=diameter

SYSTEM DRAWING

✓ **Complete drawing of proposed system, layout of laterals, position and location of tank etc.**



| | | | | | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |

Comments:
